




InverHero

INVERSILENCE TECHNOLOGY


InverSilence technology is developed by Aquagem for the most silent and saving pump solutions. It combines with full inverter technology, volute hydraulic system and DC brushless motor, not only allows the pump to run intelligently between 30~100% capacity to fulfill different application like filtration and backwash, but also reduces the sound level by more than 30 times and saving energy up to 90%.



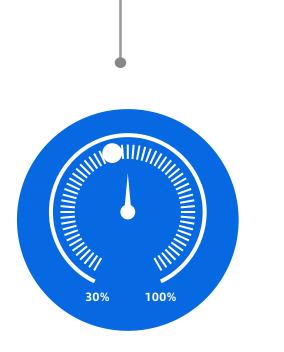



The noise is isolated by the volute structure which makes more turbulence-free flow at less noise compared with traditional diffuser type.

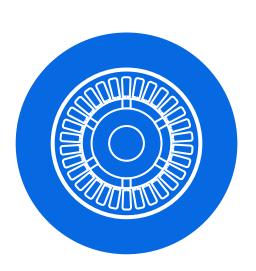


DC brushless motor

DC brushless motor ensures the pump much less noise, higher efficiency and more durability.

Full Inverter technology

The inverter drive can precisely control the pump speed round by round. It allows the running capacity to be automatically adjusted between 30~100%, which is most energy saving and silent.

Magic Inverter, Up to 15 Times More Energy-saving

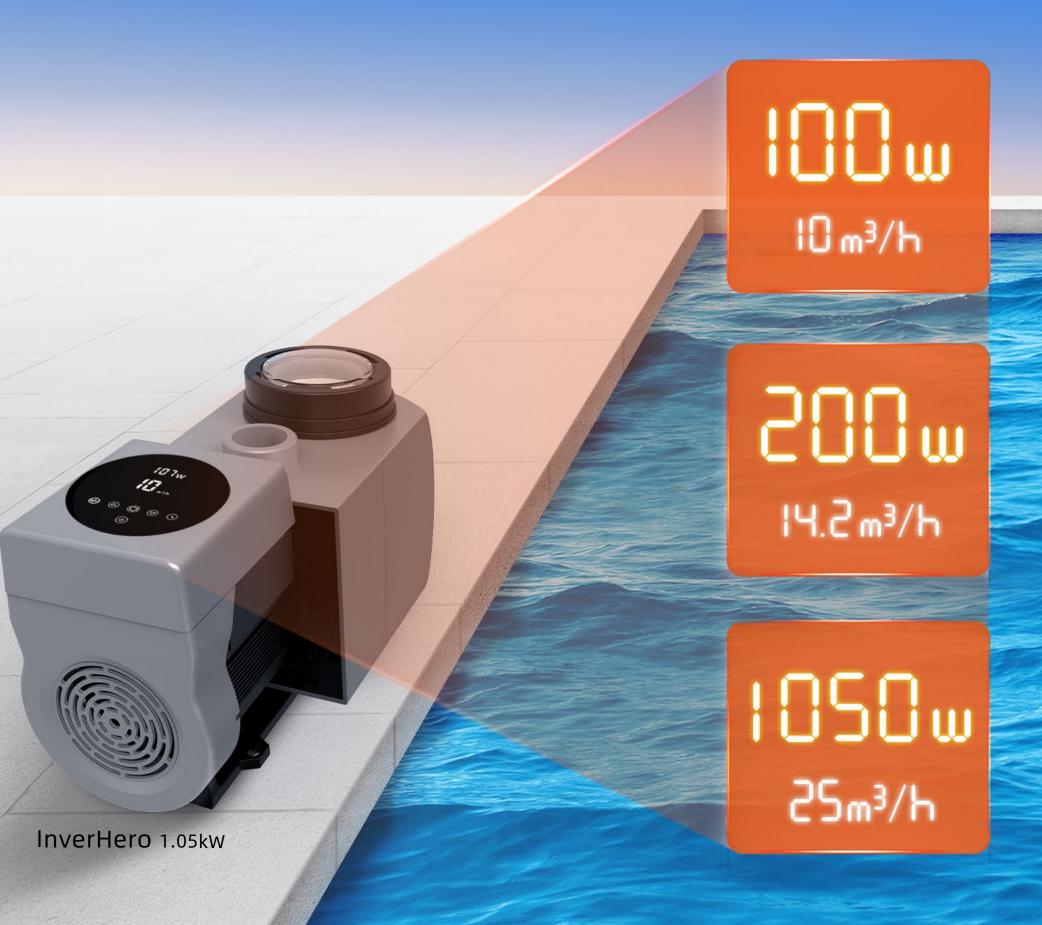


6~15 Times energy saving

1500w 25m3/h





30 Times More Silent than on/off pumps

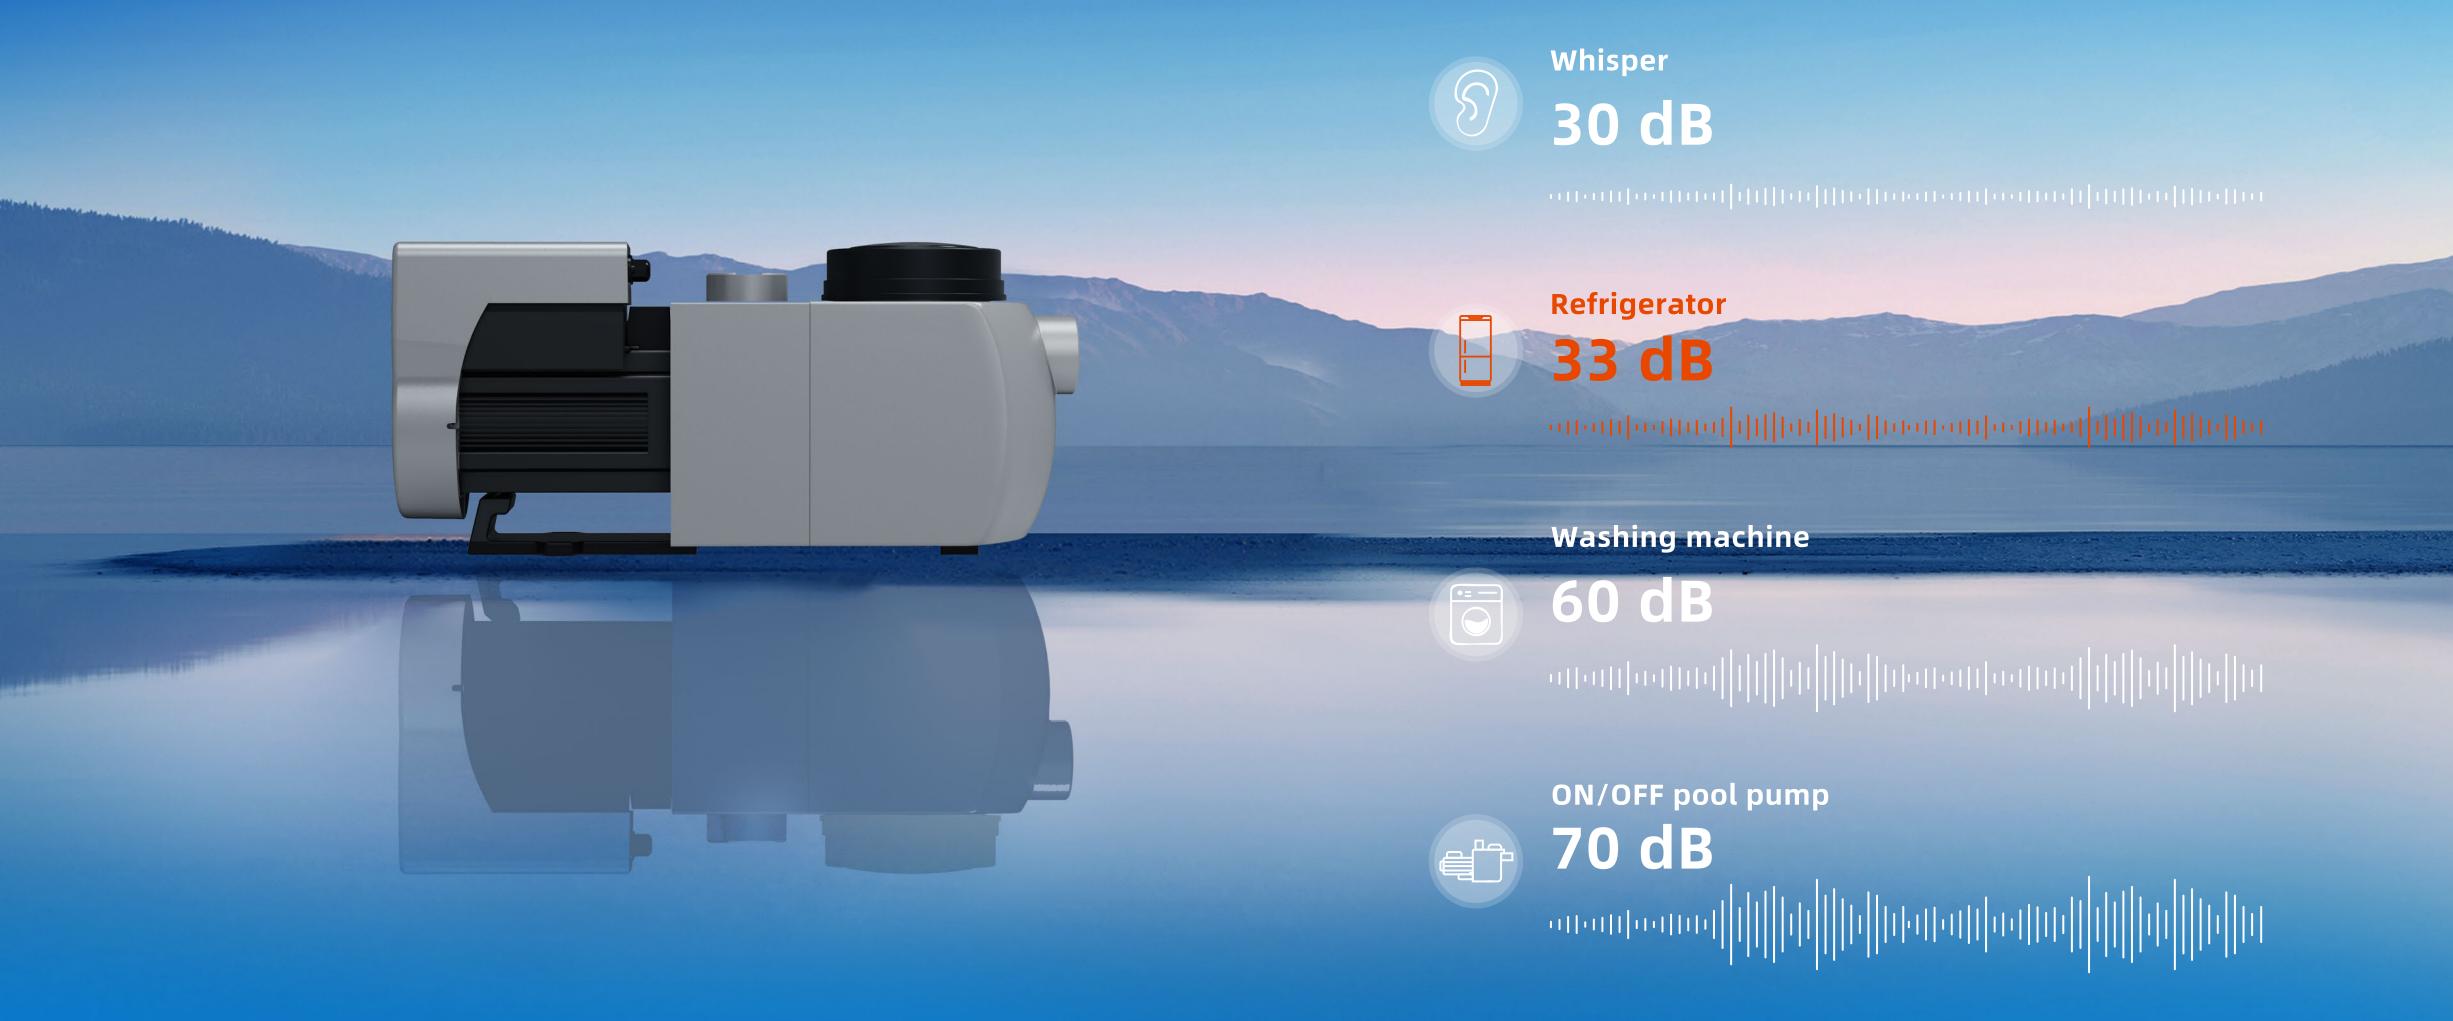



INTELLIGENT FULL TOUCH CONTROLLER



AI/MI mode optional:

• Auto Inverter mode:

After setting the water flow, the pump could automatically detect the system pressure and adjust the running capacity

• Manual Inverter mode:

The running capacity can be set manually according to different application needs



Power consumption reading



Flow reading



One-click backwash

OTHER FEATURES



External control--RS485 modbus, Digital input, Analog input, Relay output.

It allows the pump to be operated by other equipments.



WIFI optional

The pump can be controlled at anytime, anywhere.



Soft start--full protection on electrical system

With full inverter technology, Aquagem inverter pump will start from 0 apm to rated amps steadily.

There is no rush to the house electricity system.








TECHNICAL PARAMETER

Model	Advised pool volume (m³)	P1 (kW)	Voltage (V/Hz)	Qmax (m³/h)	Hmax (m)	Circulation Flow (m³/h) (Max)	
						8m	10m
IH20	30~50	0.75	220~240 / 50 / 60	23.7	11.3	17.4	11.6
IH24	40~70	1.05		26.3	13.9	23.1	19.5
IH30	50~80	1.4		28.7	16.7	27.5	25.1
IH40	70~100	1.8		-	-	-	-

PERFORMANCE CURVE

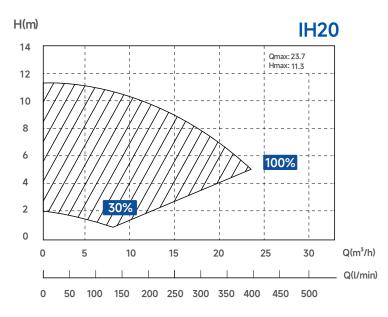

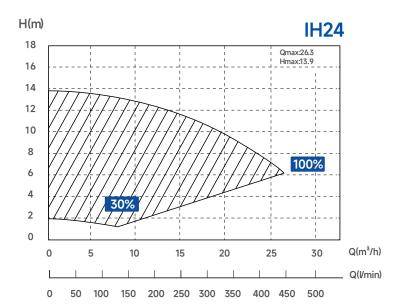

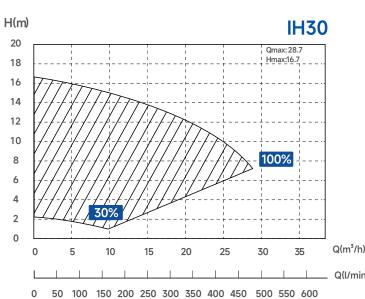

Model		Packing Dimension (mm)		
	IH20 / IH24 / IH30 / IH40	648*270*340		

